Proceedings of

IIER
INTERNATIONAL INSTITUTE OF ENGINEERS AND RESEARCHERS

TheIIER

INTERNATIONAL CONFERENCE



11th - 12th January 2025, I Cairo, Egypt

In Association with:

academics world

ASTEM

Proceedings of

TheIIER

INTERNATIONAL CONFERENCE

Cairo, Egypt

Organized by

INTERNATIONAL INSTITUTE OF ENGINEERS AND RESEARCHERS

Date of Event:

11th–12th January, 2025

In Association with

Corporate Address

INSTITUTE OF RESEARCH AND JOURNALS
Plot No- 30, Dharma Vihar, Khandagiri, Bhubaneswar, Odisha, India
Mail: info@iraj.in, www.iraj.in

Publisher: **Institute for Technology and Research (ITRESEARCH)**

© 2025, TheIIER International Conference, Cairo, Egypt

ISBN: 978-93-90150-29-8

Edn: 284

No part of this book can be reproduced in any form or by any means without prior written permission of the publisher.

Disclaimer: Authors have ensured sincerely that all the information given in this book is accurate, true, comprehensive, and correct right from the time it has been brought in writing. However, the publishers, the editors, and the authors are not to be held responsible for any kind of omission or error that might appear later on, or for any injury, damage, loss, or financial concerns that might arise as consequences of using the book.

Type set & Printed by:

Institute for Technology and Research (ITRESEARCH)

Bhubaneswar, India

About IRAJ:

Institute of Research and Journal (IRAJ) is an advanced Non-profit technological forum registered under Peoples Empowerment Trust, situated at Bhubaneswar, Odisha, for the Researchers & Scholars "to promote the progress of Science and Technology" by displaying their knowledge in the vicinity of Science and Technology for the service of mankind and the advancement of the general welfare.

Objective of IRAJ:

- To provide a world class platform to researchers to share the research findings by organizing International/National Conferences.
- To use the research output of the conference in the class room for the benefits of the students.
- To encourage researchers to identify significant research issues in identified areas, in the field of Science, Engineering, Technology and Management.
- To help dissemination of their work through publications in a journal or in the form of conference proceedings or books.
- To help them in getting feedback on their research work for improving the same and making them more relevant and meaningful, through collective efforts.
- To encourage regional and international communication and collaboration; promote professional interaction and lifelong learning; recognize outstanding contributions of individuals and organizations; encourage scholar researchers to pursue studies and careers in circuit branches and its applications.
- To set up, establish, maintain and manage centers of excellence for the study of /on related subjects and discipline and also to run self supporting projects for the benefit of needy persons, irrespective of their caste, creed or religion.

About TheIIER:

International Institute of Engineers and Researchers (IIER) is a **non-profit organization** that promotes the Engineering and Technology, related latest developments and issues to be discussed and experimented through interactions amongst the researchers and academician across the globe at a common platform in association with PET.

Conference Committee

Program Chair:

Dr. P. Suresh
M.E, Ph.D. Professor and Controller of Examinations,
Karpagam College of Engineering.,
Coimbatore, India.

Managing Director:
Mr. Bijan Kumar Barik

Conference Convener:
Miss. Dipsa Rout, TheIIER
Mob: +91-9007375847

Publication and Distribution Head:
Mr. Manas Ranjan Prusty

INTERNATIONAL ADVISORY MEMBERS

Prof. Goodarz Ahmadi,
Professor, Mechanical and Aeronautical Engineering, Clarkson University, USA

Dr Chi Hieu Le,
Senior Lecturer, University of Greenwich. Kent ME4 4TB. United Kingdom

PROF. (ER.) Anand Nayyar
Department of Computer Applications & I.T.KCL Institute of Management and Technology, Jalandhar
G.T. Road, Jalandhar-144001,Punjab, India.

Prof. R. M. Khaire,
Professor,Dept. Of Elex. and Telecommunication,B, V University,India

Dr.P.Suresh,
Professor,Karpagam College of Engineering,Coimbatore,Tamilnadu

Mark Leeson
Associate Professor (Reader)
Area of Expertise:nanoscale communications,
evolutionary algorithms, network coding and communication systems

Dr. P. K. Agarwal
Professor,Deptt. of Civil Engineering, MANIT Bhopal ,Ph. D: IIT Kanpur
M.E: Civil Engg.IIT Roorkee, Membership: Indian Road Congress (IRC), Institute of Urban Transport (IUT)

Shahriar Shahbazpanahi
Islamic Azad University,
Department of Civil Engineering, Sanandaj, Kurdistan, Iran, PhD (Structural Engineering),
University Putra Malaysia, Malaysia,2009-Present

Harun Bin Sarip
Head of Research and Innovation, Dept, UniKL-MICET
Doctorate: Université de La Rochelle, France
Member : International Society of Pharmaceutical Engineer, Singapore Chapter

Dr. Md. Al-Amin Bhuiyan
Associate Professor
Dept. of Computer Engineering, King Faisal University
Al Ahssa 31982, Saudi Arabia

Prof. (Er.) Anand nayyar
Department of Computer Applications & I.T.
KCL Institute of Management and Technology, Jalandhar
G.T. Road, Jalandhar-144001, Punjab, India

Prof. Aleksandr Cariow
institution or Company: West Pomeranian University of
Technology, Szczecin

Dr. P. K. Agarwal
Professor,Deptt. of Civil Engineering, MANIT Bhopal ,Ph. D: IIT Kanpur
M.E: Civil Engg.IIT Roorkee, Membership: Indian Road Congress (IRC), Institute of Urban Transport (IUT)

Dr. VPS Naidu
Principal Scientist & Assoc. Prof., MSDF Lab, FMCD
CSIR - National Aerospace Laboratories, Bangalore, India

Mr. P. Sita Rama Reddy
Chief Scientist ,Mineral Processing Department, CSIR - Institute of Minerals & Materials Technology
Bhubaneswar,India, M.Tech. (Chem. Engg., IIT, KGP)

Dr.P.C.Srikanth,
Professor & Head, E&C Dept, Malnad College of Engineering,Karnataka
Senior Member IEEE, Secretary IEEE Photonics Society,
M.Tech: IIT, Kanpur, Ph.D: In IISc Photonics lab

Prof. Lalit Kumar Awasthi,
Professor,Department of Computer Science & Engineering
National Institute of Technology(NIT-Hamirpur),
PhD, IIT, Roorkee, M. Tech, IIT, Delhi

Dr. Chandra Mohan V.P.
Assistant Professor, Dept. of Mech. Engg., NIT Warangal,
Warangal. Ph.D : Indian Institute of Technology(IIT),Delhi
M.B.A: Alagappa University

Prof. I.Suneetha,
Associate Professor,Dept. of ECE,AITS,Tirupati,India

Dr.s. Chandra Mohan Reddy,
Assistant Professor (SG) &Head,Dept. of Electronics & Communication Engineering,JNTUA College of Engineering,Pulivendula,Ph.D,J.N.T. University Anantapur, Anantapuramu

Gurudatt Anil Kulkarni,
I/C HOD E&TC Department,MARATHWADA MITRA MANDAL'S POLYTECHNIC

Pasuluri Bindu Swetha
Dept. Of ECE,Stanley college of Engineering & Technology for Women,Hyderabad, India

★★★

TABLE OF CONTENTS

Sl No	TITLES AND AUTHORS	Page No.
01.	**Planning of Gaziantep Province Gaziray Suburban Line Feeding Lines** ➢ *Gizem Gunaydin, Eren Ozceylan, Safak Hengirmen Tercan*	**1-11**
02.	**Biological Leverage In Humans and Animals' Self-Movement** ➢ *Yahya A. Sharif*	**12-15**
03.	**An Analysis of Federalism and State Legislative Strategy in the Context of the American Opioid Epidemic** ➢ *Georgia Beake Litle, J.D.*	**16-21**
04.	**Protein Nanoparticles for Oral Insulin Delivery** ➢ *Jeferson Zierbath, Rubiana Mara Mainardes*	**22**
05.	**The Factors Influencing Reading Performance for Science Focused Secondary Students in Thailand** ➢ *Maruai Lapcharoen*	**23-26**
06.	**Improving Inventory Management in the Dean's Office Using ABC Analysis** ➢ *Papatsorn Tantiwong, Saranyaintachot, Sukanyachatsungnoen, Unchulee Rakdanklang*	**27-31**
07.	**Real-Time Electricity Cost Calculator And Monitor** ➢ *Padej Pao-La-Or, Thanakorn Wasaram, Phanarin Yooyong, Jirasak Yukoksung, Praphan Khatawee, Chitapong Wechtaisong*	**32-39**
08.	**Development of A Robotic Arm Control Training Kit for Industrial Applications** ➢ *Padej Pao-La-Or, Jirayut Jiraanancharoenrit, Thanakorn Aeka, Narongrit Yiamsiri, Somsak Siwadamrongpong, Praphan Khatawee, Wisanukorn Samingthong, Chitapong Wechtaisong*	**40-46**
09.	**Developing Knitted Fabrics with Electromagnetic Shielding Properties** ➢ *Ramazan Erdem, Erhan Sancak, Mariyam Yeziyeva, Mine Aydogan, Ahmet Cosgun*	**47-52**

★★★

EDITORIAL

It is my proud privilege to welcome you all to the TheIIER International Conference at Cairo, Egypt. I am happy to see the papers from all part of the world and some of the best paper published in this proceedings. This proceeding brings out the various Research papers from diverse areas of Science, Engineering, Technology and Management. This platform is intended to provide a platform for researchers, educators and professionals to present their discoveries and innovative practice and to explore future trends and applications in the field Science and Engineering. However, this conference will also provide a forum for dissemination of knowledge on both theoretical and applied research on the above said area with an ultimate aim to bridge the gap between these coherent disciplines of knowledge. Thus the forum accelerates the trend of development of technology for next generation. Our goal is to make the Conference proceedings useful and interesting to audiences involved in research in these areas, as well as to those involved in design, implementation and operation, to achieve the goal.

I once again give thanks to the Institute of Research and Journals, Academics World & IASTEM for organizing this event in Cairo, Egypt. I am sure the contributions by the authors shall add value to the research community. I also thank all the International Advisory members and Reviewers for making this event a Successful one.

Editor-In-Chief

Dr.P. Suresh
M.E, Ph.D. Professor and Controller of Examinations,
Karpagam College of Engineering,
Coimbatore, India

★★★

DEVELOPING KNITTED FABRICS WITH ELECTROMAGNETIC SHIELDING PROPERTIES

[1]RAMAZAN ERDEM, [2]ERHAN SANCAK, [3]MARIYAM YEZIYEVA, [4]MINE AYDOGAN, [5]AHMET COSGUN

[1]Textile Technology, Serik GSS Vocation School, Akdeniz University,
[2]Textile Engineering, Technology Faculty, Marmara University,
[3]Textile and Fashion Design, Fine Arts Faculty, Akdeniz University,
[4]Fashion Design, Serik GSS Vocational School, Akdeniz University,
[5]Mechanical Engineering, Engineering Faculty, Akdeniz University
E-mail: ramazanerdem@akdeniz.edu.tr, esancak@marmara.edu.tr, mariyam-ezieva@mail.ru, maydogan@akdeniz.edu.tr, acoskun@akdeniz.edu.tr

Abstract - This study investigates the influence of conductive yarn content on the electromagnetic shielding effectiveness (EMSE) and surface resistivity of knitted fabrics. The fabrics, made with conductive core-spun yarns and 100% cotton yarns, were produced using consistent knitting pattern types and yarn counts, allowing for a comparative analysis of the impact of conductive material quantity. Results indicate a clear inverse relationship between surface resistivity and conductivity, with fabrics containing higher amounts of conductive yarn demonstrating lower surface resistivity and superior shielding performance. Notably, fabrics coded S10-46, S20-46, R10-45, R20-45, I10-49, and I20-49 exhibited significantly better EMSE, particularly in the 0.1-0.6 GHz frequency range, where they performed better than their counterparts. However, a gradual decline in EMSE was observed at higher frequencies, suggesting that metal conductive wires are more effective at shielding electromagnetic radiation at lower frequencies. The shielding mechanisms of absorption and reflection were also evaluated, with absorption consistently surpassing reflection across all fabric types in the 0.1-3 GHz range. These findings highlight the critical role of conductive material quantity and fabric structure in optimizing EMSE for applications in electromagnetic radiation shielding.

Keywords - Electromagnetic Shielding, Knitting, Fabric, Cotton, Conductivity, Stainless Steel, Ring Spinning.

I. INTRODUCTION

In recent years, technological advancements have significantly altered people's habits, making electrical and electronic devices essential in daily life. These technologies, used extensively in homes and workplaces, include mobile phones, wireless networks, computers, medical devices, power lines, and communication systems such as radios and televisions. However, these devices emit significant amounts of electromagnetic (EM) waves, increasing exposure to electromagnetic pollution [1-3]. As a result, EM radiation has become one of the most prominent sources of pollution, ranking just behind noise, air, and water pollution [4, 5].

EM waves consist of electric and magnetic fields, characterized by three key properties: wavelength, frequency, and energy. Wavelength refers to the distance between two wave peaks, measured in meters, while frequency is the number of oscillations per second, measured in Hertz (Hz). Wavelength and frequency are inversely related, meaning that as the wavelength increases, the frequency decreases. The energy carried by a photon in the wave is directly proportional to its wavelength, with shorter wavelengths carrying higher energy [3, 6].

Numerous studies have examined the harmful effects of EM radiation on the human body, exploring its impact on nerve cells, brain tissue, DNA, reproductive systems, immunity, and metabolism [7-9]. Research has shown that EM waves can cause molecular vibrations in biological cells, leading to increased heat and halting DNA and RNA cell repair. There is also evidence suggesting that EM radiation may promote abnormal chemical reactions in the body, potentially triggering the development of cancer, including leukemia. Additionally, exposure to EM waves has been linked to symptoms such as headaches, fatigue, dizziness, sleep disturbances, and memory problems [10, 11].

To mitigate the risks of EM radiation, "shielding" is considered the most effective solution. This involves using conductive or magnetic materials to block or reduce electromagnetic fields [12]. While metals are highly effective at shielding, they tend to be expensive, heavy, and prone to issues like oxidation and corrosion [13]. As an alternative, conductive textiles—fabric materials woven with metallic particles, carbon fibers, or metal wires—offer a lightweight, flexible, and cost-effective solution for EM shielding. These textiles are increasingly used in industries like defense and electronics [3, 14]. Several studies have explored the electromagnetic shielding effectiveness (EMSE) of various textile materials, including woven fabrics, fabric-reinforced composites, and nonwoven surfaces [13, 15-18].

The primary goal of the current research is to develop innovative conductive yarn structures for creating knitted garments with EM shielding properties. This involves wrapping stainless steel fibers with short cotton fibers using a specialized technique in a ring spinning machine. The resulting materials are then used to produce different knitted fabric structures, such as single jersey, rib (1x1), and interlock fabrics, and their mechanical, thermal, and EMSE properties are evaluated.

II. MATERIALS AND METHODS

A. Preparation of Conductive Core-Spun Yarns

In the present study, 100% stainless-steel wire (Elektrisola, Germany) with a 40 µm diameter was used as the conductive core material. The core-spun yarn, which combines stainless-steel (SS) wire and 100% cotton, was produced on a ring spinning machine. The SS wire was carefully positioned at the center of the final core-spun yarn using elastane feeding guides on the spinning machine.

During the production process, the stainless-steel (SS) wire is wrapped with carded cotton roving (Ne1). The cotton fibers are first thinned to the desired thickness in the drafting zone of the machine before they undergo the spinning process. The SS wire is then inserted into the cotton fibers on the exit cylinder, allowing the wire to be incorporated directly into the cotton without any tension or drawing (see Figure 1). Ultimately, two yarn counts (~Ne10 and ~Ne20) were produced with a twist level of αe:4.8 and a spindle speed of 7000 turnings per minute (t/m). The physical properties of the resulting conductive core-spun yarns, along with the corresponding 100% cotton yarns used in knitting, are presented in Table I.

	Yarn count (Ne)		
Yarns types		sd	CV (%)
Core-spun 1	20,15	0,12	0,59
100% cotton	19,12	0,22	1,14
Core-spun 2	9,56	0,05	0,53
100% cotton	10,8	0,33	1,1

Table I. Linear densities (Ne) and evenness values of the ring-spun yarns.

B. Production of Conducted Weft Knitted Fabrics

Different types of weft-knitted fabrics, including single jersey, rib (1x1), and interlock, were created using conductive core-spun yarns and 100% cotton yarns on a 7G automatic flat knitting machine (CMS 420, Stoll). Three distinct course densities were selected for each fabric type during the knitting process. Both the conductive core-spun and cotton yarns were fed through the same carrier on the machine. The structural properties of the resulting knitted fabrics are presented in Tables II, III, and IV, respectively.

Fabric Code	Core Spun Yarn	100% cotton yarn	Loop length (cm)	Courses (per cm)	Wales (per cm)	Amount of conductive yarn (cm/cm²)	Fabric thickness (mm)	Fabric weight (g/m²)
S-10-32	Ne10/1	Ne10/1	0,9	7	5	32	1,72	352
S-10-43	Ne10/1	Ne10/1	0,8	9	6	43	1,53	373
S-10-46	Ne10/1	Ne10/1	0,7	11	6	46	1,43	440
S-20-32	Ne20/1	3x(Ne20/1)	0,9	7	5	32	1,59	356
S-20-43	Ne20/1	3x(Ne20/1)	0,8	9	6	43	1,5	390
S-20-46	Ne20/1	3x(Ne20/1)	0,7	11	6	46	1,38	453

S-10-32= S: Single jersey (knitting type), 10: Yarn count (Ne), 32: Amount of conductive yarn (cm/cm²)

Table II. Structural properties of single jersey knitted fabrics.

Fabric Code	Core Spun Yarn	100% cotton yarn	Loop length (cm)	Courses (per cm)	Wales (per cm)	Amount of conductive yarn (cm/cm²)	Fabric thickness (mm)	Fabric weight (g/m²)
R-10-33	Ne10/1	Ne10/1	1,1	5	3	33	2,11	347
R-10-43	Ne10/1	Ne10/1	0,9	6	4	43	2,37	437
R-10-45	Ne10/1	Ne10/1	0,8	7	4	45	2,41	518
R-20-33	Ne20/1	3x(Ne20/1)	1,1	5	3	33	1,89	348
R-20-43	Ne20/1	3x(Ne20/1)	0,9	6	4	43	2,3	415
R-20-45	Ne20/1	3x(Ne20/1)	0,8	7	4	45	2,46	508

R-10-33= R: Rib (knitting type), 10: Yarn count (Ne), 33: Amount of conductive yarn (cm/cm²)

Table III. Structural properties of rib (1x1) knitted fabrics.

Fabric Code	Core Spun Yarn	100% cotton yarn	Loop length (cm)	Courses (per cm)	Wales (per cm)	Amount of conductive yarn (cm/cm²)	Fabric thickness (mm)	Fabric weight (g/m²)
I-10-36	Ne10/1	Ne10/1	0,9	5	4	36	2,65	578
I-10-48	Ne10/1	Ne10/1	0,8	6	5	48	3,15	666
I-10-49	Ne10/1	Ne10/1	0,7	7	5	49	3,07	722
I-20-36	Ne20/1	3x(Ne20/1)	0,9	5	4	36	3,12	581
I-20-48	Ne20/1	3x(Ne20/1)	0,8	6	5	48	3,14	664
I-20-49	Ne20/1	3x(Ne20/1)	0,7	7	5	49	3,08	693

I-10-36= I: Interlock (knitting type), 10: Yarn count (Ne), 36: Amount of conductive yarn (cm/cm²)

Table IV. Structural properties of interlock knitted fabrics.

C. Measurement of Electromagnetic Shielding Effectiveness (EMSE)

The knitted fabrics were conditioned at 20±2 ºC and 65±2% relative humidity for 24 hours before the experiments. EMSE of the specimens were measured according to ASTM D4935-10 standard by utilizing coaxial transmission line technique in the frequency range between 0,1 GHz and 3 GHz. A compact testing device (Electro-Metrics Inc., model EM-2107 A, USA) was used to determine the EMSE of the knitted fabrics. Reflectivity, absorption, and transmissibility of the electromagnetic (EM) wave power of the textiles were assessed via a network analyzer (Rohde & Schwarz, ZVL/9 kHz-13.6 GHz) equipped with two coaxial connectors and two attenuators (10 dB) for generating and receiving EM signals.

To realize the EMSE assessment of knitted fabrics in accordance with insertion-loss method, two specimens were required for each test; one for the reference and another for the loaded samples (conductive knitted fabrics; single jersey, rib (1x1), and interlock). The specimen dimension was set to be 133 mm, which matches the exact diameter as the outer ring dimension. Considering incident and transmitted power, the difference in attenuation between a reference sample and the loaded specimen was evaluated to determine

EMSE. The results of the calculations were expressed in decibels (dB) which is the unit indicating the power ratio that is used for specifying the shielding efficiency.

Surface resistivity of the knitted fabrics was determined by utilizing the Keithley 6517A Electrometer/High Resistance Meter device in accordance with the ASTM D257-07 standard. Surface resistivity was assessed by putting a voltage potential across the specimen's outer layer, measuring the resulting current.

III. RESULTS AND DISCUSSION

A. The Impact of Conductive Material Amount on EMSE and Surface Resistivity

To evaluate the impact of conductive yarn quantity on the electromagnetic shielding effectiveness (EMSE) and surface resistivity of knitted fabrics, the knitting pattern type and yarn count were kept consistent across samples. As a result, fabrics with the same pattern and yarn count were compared to each other (Fig. 1-5). It is well-established that surface resistivity and conductivity are inversely related, meaning lower surface resistivity indicates higher conductivity. Additionally, the amount of conductive yarn per square inch varied depending on the total length of the loops in the knitted structure [19]. The data clearly showed that fabrics coded S10-46, S20-46, R10-45, R20-45, I10-49, and I20-49 exhibited lower surface resistivity within their respective categories due to the higher amount of conductive material per unit area. Regarding EMSE performance, these same fabrics (S10-46, S20-46, R10-45, R20-45, I10-49, and I20-49) demonstrated superior shielding effectiveness compared to other fabrics in the same group, which can be attributed to their higher conductivity.

Furthermore, all knitted samples showed better EMSE in the 0.1-0.6 GHz frequency range, with a gradual decline in performance observed at higher frequencies, despite some fluctuations. This decrease in EMSE at higher frequencies may be due to the metal conductive wires being more effective at shielding electromagnetic radiation at lower frequencies than at higher ones [20].

The shielding of electromagnetic waves involves two main mechanisms: absorption and reflection. The absorption and reflection characteristics of the knitted fabrics are shown in (Fig. 1-6). Both reflection and absorption decreased as the frequency increased. Additionally, absorption levels were consistently higher than reflection values across all groups in the 0.1 GHz to 3 GHz range, which can be attributed to the inherent properties of the conductive material [21].

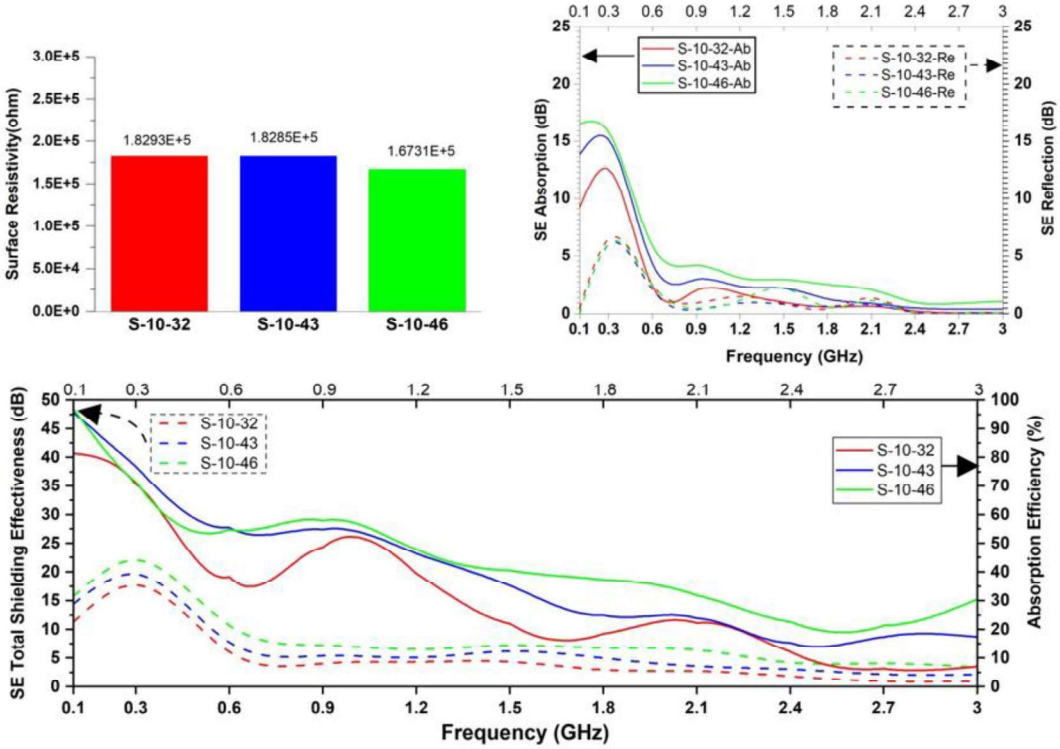


Fig. 1. The influence of conductive material on EMSE performance of single jersey fabrics made of Ne10 conductive yarn.

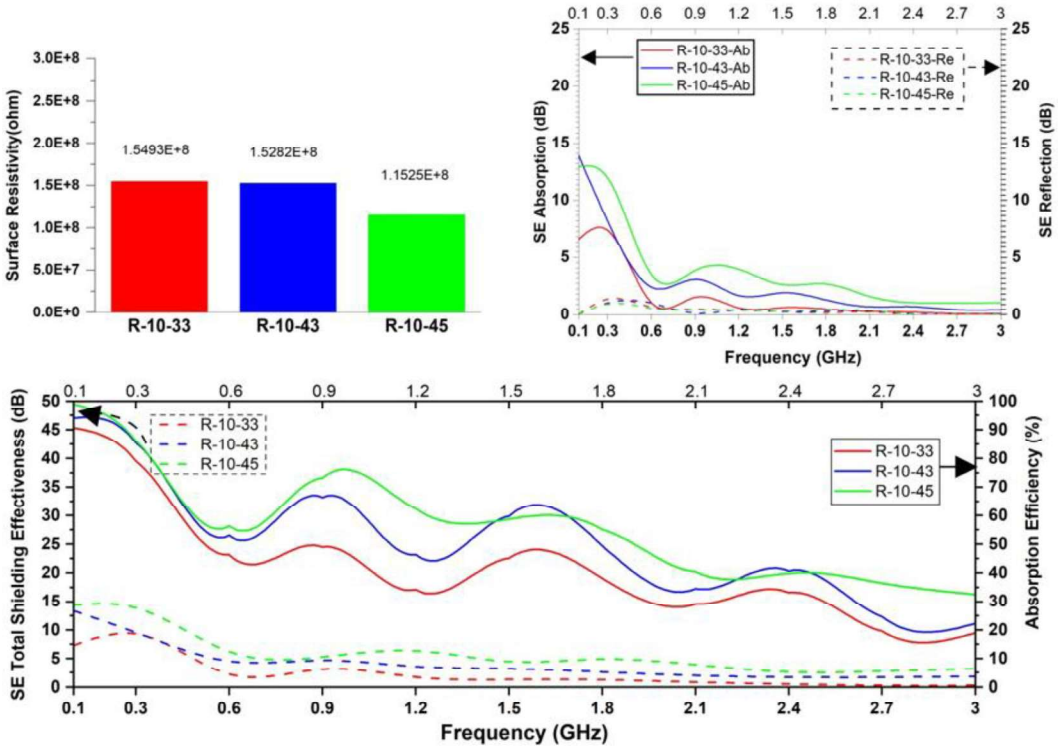


Fig. 2. The influence of conductive material on EMSE performance of ribana fabrics made of Ne10 conductive yarn.

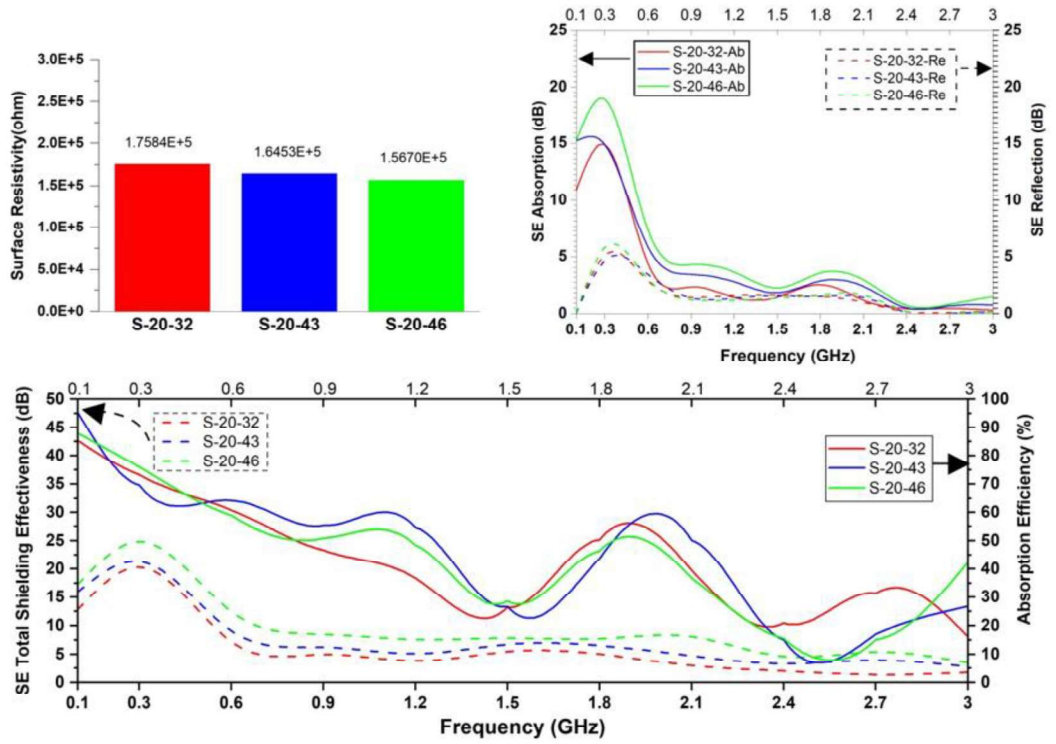


Fig. 3. The influence of conductive material on EMSE performance of single jersey fabrics made of Ne20 conductive yarn.

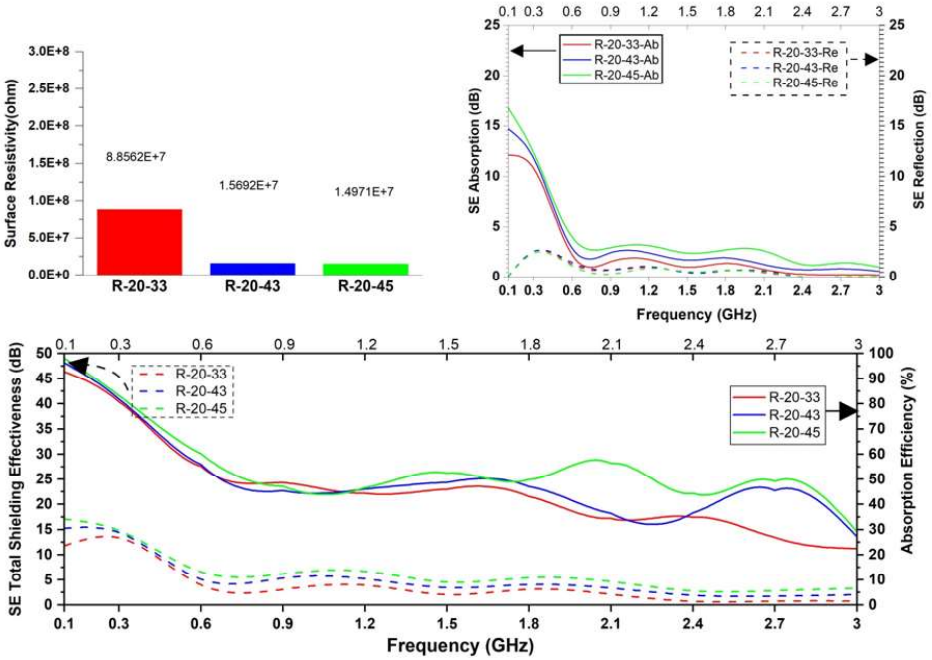


Fig. 4. The influence of conductive material on EMSE performance of ribana fabrics made of Ne20 conductive yarn.

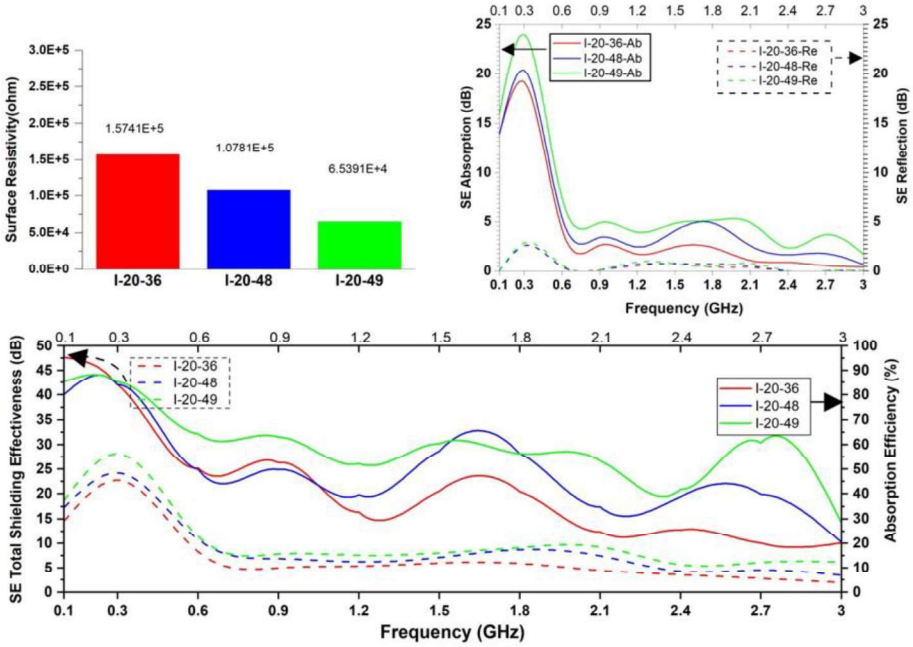


Fig. 5. The influence of conductive material on EMSE performance of interlock fabrics made of Ne20 conductive yarn.

IV. CONCLUSION

This study demonstrates that the amount of conductive yarn incorporated into knitted fabrics plays a significant role in determining both the electromagnetic shielding effectiveness (EMSE) and surface resistivity. Fabrics with higher conductive yarn content exhibited lower surface resistivity and superior EMSE, particularly in the lower frequency range of 0.1-0.6 GHz. The inverse relationship between surface resistivity and conductivity underscores the importance of material composition in achieving optimal shielding performance. Furthermore, the study highlights the effectiveness of metal conductive wires in shielding electromagnetic radiation, with better performance at lower frequencies and a gradual decline at higher frequencies. The analysis of absorption and reflection behaviors further confirms that absorption is the dominant shielding mechanism in the 0.1-3 GHz range. These findings suggest that the design of knitted fabrics for electromagnetic radiation shielding

should prioritize increasing the conductive material content while considering frequency-dependent shielding behaviors. Overall, the results contribute valuable insights into the development of knitted textiles for use in applications requiring effective electromagnetic protection.

REFERENCES

[1] A. Bedeloglu, "Electrical, electromagnetic shielding, and some physical properties of hybrid yarn based knitted fabrics", J. Text. Inst., vol. 104, no. 11, pp.1247-1257, April 2013.

[2] E. Sancak, M. Akalin, İ. Usta, M. Yuksek, M. S. Özen, "The effects of fabric and conductive wire properties on electromagnetic shielding effectiveness and surface resistivity of interlock knitted fabrics", Fibers Polym., vol. 19 no. 4, pp. 843-853, June 2018.

[3] R. Erdem, "Evaluation of electromagnetic shielding effectiveness of multi-axial fabrics and their reinforced PES composites", Bull. Mater. Sci., vol. 39, no. 4, pp. 963–970, July 2016.

[4] F. Ceken, G. Pamuk, O. Kayacan, A. Ozkurt, Ş. S. Ugurlu, "Electromagnetic shielding properties of plain knitted fabrics containing conductive yarns" J. Eng. Fibers Fabr., vol. 7, no. 4, pp. 81–87, December 2012.

[5] F. Çeken, Ö. Kayacan, A. Özkurt, Ş. S. Uğurlu, "The electromagnetic shielding properties of some conductive knitted fabrics produced on single or double needle bed of a flat knitting machine", J. Text. Inst., vol. 103, no. 9, pp. 968-979, November 2012.

[6] A. K. Sharma, P. Bhardwaj, K. K. Singh, S. K. Dhawan, "Improved microwave shielding properties of polyaniline grown over three-dimensional hybrid carbon assemblage substrate", Appl. Nanosci., vol. 5, pp. 635–644, September 2015.

[7] M. Shbanah, T. A. Kovács, "The Effects of Electromagnetic Waves on Human Health", In: Kovács TA, Nyikes Z, Fürstner I. (eds) Security-Related Advanced Technologies in Critical Infrastructure Protection. NATO Science for Peace and Security Series C: Environmental Security. Springer, Dordrecht, September 2022.

[8] S. Batool, A. Bibi, F. Frezza, F. Mangini, "Benefits and hazards of electromagnetic waves, telecommunication, physical and biomedical: a review", Eur. Rev. Med. Pharmacol. Sci., vol. 23, pp. 3121-3128, 2019.

[9] R. Gautam, E. Priyadarshini, J. Nirala, P. Rajamani, "Impact of nonionizing electromagnetic radiation on male infertility: an assessment of the mechanism and consequences", Int. J. Radiat. Biol., vol. 98, no. 6, pp. 1063-1073, October 2022.

[10] M. S. Ozen, E. Sancak, M. Akalin, "The effect of needle-punched nonwoven fabric thickness on electromagnetic shielding effectiveness", Text. Res. J., vol. 85, no. 8, pp. 804–815, November 2014.

[11] C-I. Su, J-T. Chern, "Effect of stainless steel-containing fabrics on electromagnetic shielding effectiveness", Text. Res. J., vol. 74, no. 1, pp. 51-54, January 2004.

[12] K. B. Cheng, S. Ramakrishna, K. C. Lee, "Development of conductive knitted- fabric-reinforced thermoplastic composites for electromagnetic shielding applications", J. Thermoplast. Compos. Mater., vol. 13, no. 5, pp. 378-399, September 2000.

[13] H. C. Chen, K. C. Lee, J. H. Lin, M. Koch, "Fabrication of conductive woven fabric and analysis of electromagnetic shielding via measurement and empirical equation", J. Mater. Process. Technol., vol. 184, pp. 124-130, April 2007.

[14] S. Tezel, Y. Kavuşturan, G. A. Vandenbosch, V. Volski, "Comparison of electromagnetic shielding effectiveness of conductive single jersey fabrics with coaxial transmission line and free space measurement techniques", Text. Res. J., vol. 84, no. 5, pp. 461-476, November 2014.

[15] K. B. Cheng, M. L. Lee, S. Ramakrishna, T. H. Ueng, "Electromagnetic shielding effectiveness of stainless steel/polyester woven fabrics", Text. Res. J., vol. 71, no. 1, pp. 42-39, January 2001.

[16] K. B. Cheng, S. Ramakrishna, K. C. Lee, "Electromagnetic shielding effectiveness of copper/glass fiber knitted fabric reinforced polypropylene composites", Compos. - A: Appl. Sci. Manuf., vol. 31, pp. 1039-1045, October 2000.

[17] H.C. Chen, K. C. Lee, J. H. Lin, "Electromagnetic and electrostatic shielding properties of co-weaving-knitting fabrics reinforced composites", Compos. - A: Appl. Sci. Manuf., vol. 35, no. 11, pp. 1249-1256, November 2004.

[18] Z. Fan, R. Liu, X. Cheng, "Preparation and characterization of electromagnetic shielding composites based on graphene-nanosheets-loaded nonwoven fabric", Coatings, vol. 11, pp. 424, April 2021.


[19] M. S. Ozen, E. Sancak, N. Soin, T. H. Shah, E. Siores, "Investigation of electromagnetic shielding effectiveness of needle punched nonwoven fabric produced from conductive silver coated staple polyamide fibre", J. Text. Inst., vol. 107, no. 7, pp. 912–922, August 2016.

[20] S. Tezel, Y. Kavusturan, G. ae Vandenbosch, V. Volski, "Comparison of electromagnetic shielding effectiveness of conductive single Jersey fabrics with coaxial transmission line and free space measurement techniques", Textil. Res. J., vol. 84, no. 5, pp. 461–476, November 2014.

[21] K.B. Cheng, S. Ramakrishna, K.C. Lee, Electromagnetic shielding effectiveness of copper/glass fiber knitted fabric reinforced polypropylene composites, Compos. - A: Appl. Sci. Manuf., vol. 31, no. 10, pp. 1039-1045, October 2000.


★★★

IRAJ INTERNATIONAL JOURNALS




International Journal of Mechanical and Production Engineering (IJMPE)

ISSN(P):2320-2092
ISSN(e):2321-2071
www.ijmpe.iraj.in



International Journal of Industrial Electronics and Electrical Engineering(IJIEEE).

ISSN(P):2347-6982
ISSN(e):2349-204X
www.ijieee.iraj.in



International Journal of Electrical, Electronics and Data Communication

ISSN(P):2320-2084
ISSN(e):2321–2950
www.ijeedc.iraj.in



International Journal of Advances in Mechanical and Civil Engineering(IJAMCE)

ISSN(P):2394-2827
www.ijamce.iraj.in



International Journal of Soft Computing And Artificial Intelligence (IJSCAI)

ISSN(P):2321–404X
ISSN(e):2321–4384
www.ijscai.iraj.in



International Journal of Management and Applied Science (IJMAS)

ISSN(P):2394-7926
www.ijmas.iraj.in




International Journal of Advances in Computer Science and Cloud Computing (IJACSCC)

ISSN(P):2321–4058
ISSN(e):2321–4392
www.ijacscc.iraj.in



International Journal of Advance in Electronics and Computer Science (IJAECS)

ISSN(P):2393-2835
www.ijaecs.iraj.in



International Journal of Advances in Science, Engineering and Technology(IJASEAT)

ISSN(P):2321-8991
ISSN(e):2321–9009
www.ijaseat.iraj.in



International Journal of Mechanical and Production Engineering (IJMPE)

ISSN(e):2320-2106
ISSN(P):2320-2106
www.ijacen.iraj.in

INDEXING PARTNERS

Google scholar · Science Impact Factor · Scholarsteer Scholarly Information · Journal Factor · DOAJ Directory of Open Access Journals · ICI World of Journals · IIS · DRJI

WhatisResearch.com · IJIFACTOR INDEXING · RESEARCHBIB ACADEMIC RESOURCE INDEX · OAJI.net Open Academic Journals Index · CiteFactor Academic Scientific Journals · BASE Bielefeld Academic Search Engine · JOUR INFORMATICS

IRAJ Journals Listed in University Library

MIT, University of California Berkeley, Stanford, Cambridge, Oxford, Harvard

Visit for Upcoming Conferences - www.theiier.org

INSTITUTE OF RESEARCH AND JOURNALS

Conference Alert

ALLCONFERENCEALERT
www.allconferencealert.com

Conference Gallery

WRL WORLD RESEARCH LIBRARY

This book will be available online at World Research Library
www.worldresearchlibrary.org

ISBN

978-93-90150-25-0